


# Stainless Steel Adjustable Rods

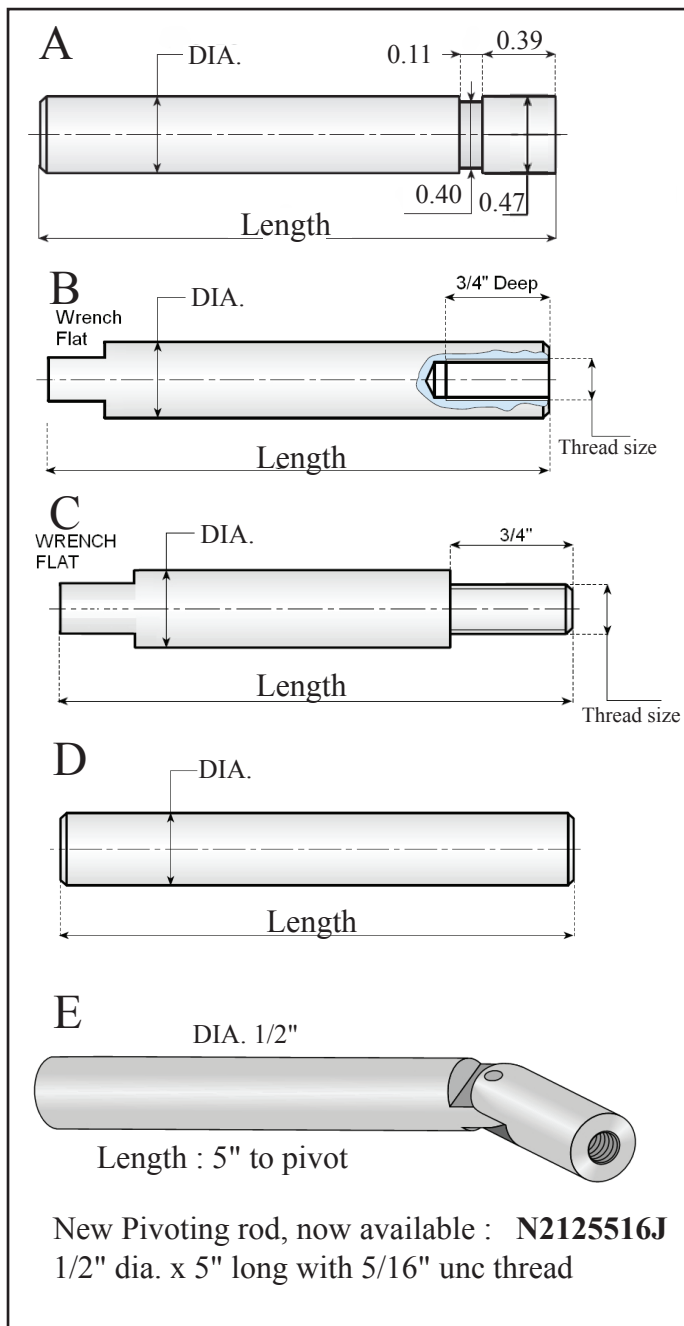

Code	Description	Type
020R3MB	1/2" x 3" c/w groove	A
020R5MB	1/2" x 5" c/w groove	A
020R8MB	1/2" x 8" c/w groove	A
020R10MB	1/2" x 10" c/w groove	A
212-3-516	1/2" x 3" c/w 5/16" unc tapped thread	B
212-5-516	1/2" x 5" c/w 5/16" unc tapped thread	B
212-8-516	1/2" x 8" c/w 5/16" unc tapped thread	B
212-5-38	1/2" x 5" c/w 3/8" unc tapped thread	B
212-5-38M	1/2" x 5" c/w 3/8" unc male thread	C
020R5	1/2" x 5" plain	D
020R8	1/2" x 8" plain	D
020R10	1/2" x 10" plain	D
020R12	1/2" x 12" plain	D
212-5-516J	1/2" x 5" with pivot head threaded 5/16	E
212-9-516J	1/2" x 9" with pivot head threaded 5/16	E
212-12-516J	1/2" x 12" with pivot head threaded 5/16	E

Material : S.S. 303

Diameter : 1/2" standard, 5/8" available on request

Standard lengths : 3", 5", 8", 10", 12"

(custom lengths available upon request)


Groove or Thread (5/16" unc, 3/8" unc, 3/8" unc male)

Rod type	can be used with clamp #
A	210, 739, 740, 82B
B - E	215, 217, 903, 216, 275
C	217, 213
D	Plain rod to be used with cross blocks and photocell components



Laser-numbered rods available on request



## Safety Caps



**Part 020-M-CAP-B**  
Supplied in black rubber  
1/2" bore x 1" long x 2-1/4" od.

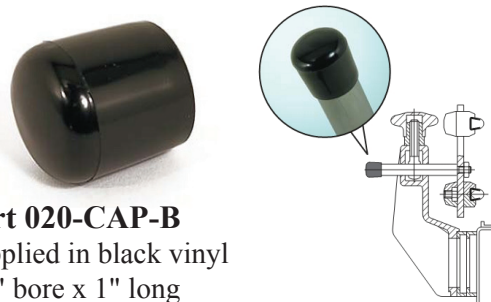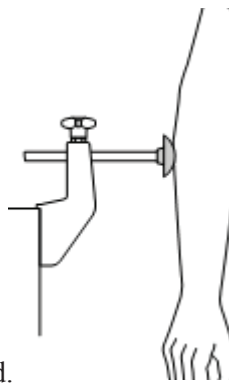

**Part 020-CAP-B**  
Supplied in black vinyl  
1/2" bore x 1" long  
(Other colors available on request.)

