

HabasitLINK® Radius 1-1/2" Pitch Belting M3843 Tight Radius GripTop 1.5"




Description

- For radius and straight conveying, ideal for applications with limited space, with inclines (collapse factor 1.6)
- 31% open area; 50% open contact area; largest opening 7x19 mm (0.27"x0.75")
- Indent 30 mm (1.18")
- Abrasion resistant GripTop, high friction
- Food approved materials available
- Rod diameter 6 mm (0.24")
- Steel rods every 4th row when fully covered with rubber
- "Open window" sprockets

Accessories

- Flights M3840: minimum indent 105 / 95 mm (4.1" / 3.7")
- Sideguards
- Hold down modules

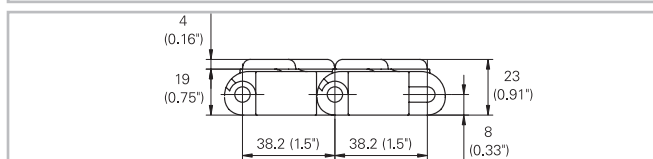

Belt data

Belt material		PP		POM
GripTop material		TPE		
Rod material		POM / Steel	PA / Steel	
Nominal tensile strength F'_N straight run	N/m	20000	20000	29000
	lb/ft	1370	1370	1986
Nominal tensile strength F_N in curve ⁽¹⁾	N	1800	1800	2250
	lbf	405	405	506
Temperature range	°C	5 - 60	5 - 60	-40 - 60
	°F	40 - 140	40 - 140	-40 - 140
Belt weight m_B	kg/m²	8.9	8.9	12.7
	lb/sqft	1.83	1.83	2.60

⁽¹⁾ For $b_0 > 600$ mm (23.6") higher admissible values are admissible.

Stainless steel rods are needed in every 4th row if GripTop modules are applied every row (fully covered with rubber).

Use GripTop modules in every second row and M3843 middle modules in the intermediate rows to achieve a sufficient lateral stiffness without using steel rods (in this case the belt weight is around 10% less than the value indicated in the table).

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without side- guards or hold down devices (minimum)		Backbending radius for elevators with sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
60	2.4	100	4	150	6	150	6	250	10

Use the largest possible backbending radius for elevators with side guards or hold down devices.

HabasitLINK® Radius 1-1/2" Pitch Belting

M3843 Tight Radius GripTop 1.5"



Standard range of belt widths b_0 and collapse factor Q ($R_{min} = Q \times b_0$)

Belt width mm (nom.)	250	300	350	400	450	500	550	600	650	700	750	800	850	900
Belt width inch (nom.)	10	12	14	16	18	20	22	24	26	28	30	32	34	36
Coll.fact. Q	1.50	1.53	1.55	1.57	1.59	1.60	1.61	1.62	1.62	1.63	1.63	1.64	1.65	1.66
Belt width mm (nom.)	950	1000	1050	1100	1150	1200								
Belt width inch (nom.)	38	40	42	44	46	48								
Coll.fact. Q	1.68	1.70	1.72	1.73	1.75	1.76								

Belt widths larger 1200 mm (48") not recommended; *please contact your Habasit representative*.
Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 50 mm (2"). Non-standard widths are offered in increments of 25 mm (1"). Smallest possible width 175 mm (7").

For detailed material properties refer to the HabasitLINK® Engineering Guidelines or contact your Habasit representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.
All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.
BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.