


# HabasitLINK® Sprockets - 2" Pitch Belting

## Sprocket Series M5200

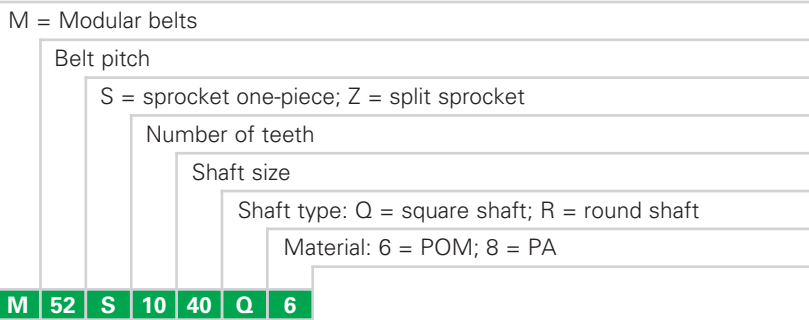

### Sprocket availability

Type	Number of teeth	Diam. of pitch $\varnothing d_p$		$A_1$		Hub width $B_L$		Square bore Q		Standard material
		mm	inch	mm	inch	mm	inch	mm	inch	
S-C1	10	165.1	6.5	74.2	2.92	22.7	0.89	40 / 60	1.5 / 2.5	POM
S-C1	12	197.2	7.8	90.4	3.56	22.7	0.89	40 / 60	1.5 / 2.5	POM


S: molded sprockets. Other sprocket and hub sizes on request.

**Key ways** for round bore shape follow European standards for metric sizes and US standards for imperial sizes. For detailed dimensions see table in the Design Guide.


**Other materials** available on request.



### Sprocket arrangement

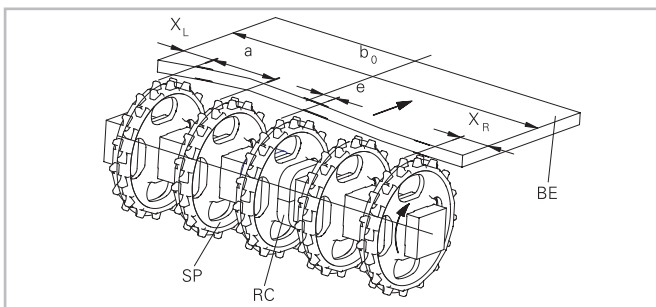

**BE** Belt  
**RC** Retainer  
**SP** Sprocket  
 $b_0$  belt width

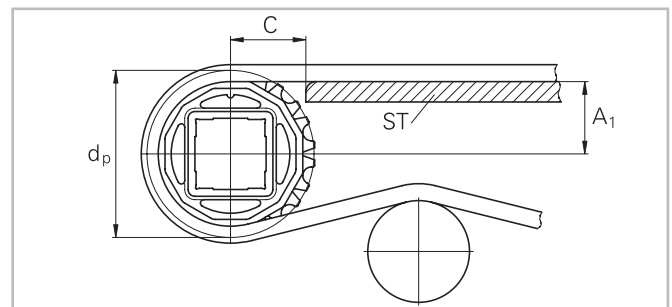

The distance **C** between the sprocket axis and the slider support **ST** is minimal 53 mm (2.1").

### Wearstrips

Between driving shaft and idling sprockets or rollers the belt is carried by a slider support furnished with longitudinal wear strips from UHMW Polyethylene or other suitable material.

# HabasitLINK® Sprockets - 2" Pitch Belting


## Sprocket Series M5200



### Sprocket positioning

For correct positioning of the center sprocket divide the belt width by the link increment. The rounded result will be an even or an odd number. These numbers are the criteria for offset or no offset, see table.

Belt type	Sprocket spacing a		Sprocket edge distance (minimal)		Criteria for center sprocket position	Result of formula (rounded)	Offset e	Remarks
	minimal mm inch	maximal mm inch	X <sub>L</sub> mm inch	X <sub>R</sub> mm inch				
M5290	50.8	152.4	53.5	39.4	$b_0 / 25.4$	even number (2, 4, 6 ...)	6.35	right in running direction A
M5293	2	6	2.11	1.55	$b_0 / 1$	odd number (3, 5, 7 ...)	0.25	left in running direction B
							6.35	left in running direction A
							0.25	right in running direction B

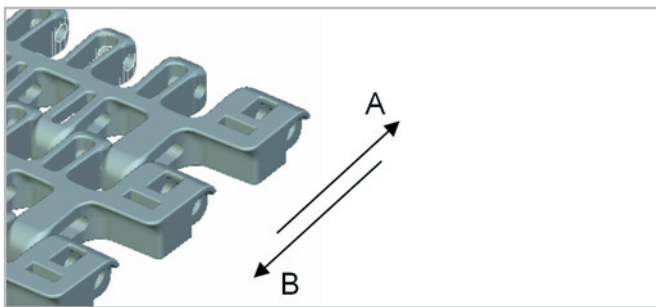

# HabasitLINK® Sprockets - 2" Pitch Belting

## Sprocket Series M5200



### Numbers of sprockets and wearstrips for M5290 and M5293

Standard belt width (nominal)		Number of sprockets per shaft	Number of wearstrips	
<i>inch</i>	mm	min. number	Carryway (top)	Returnway (bottom)
20	508	3	2	2
22	559	3	2	2
24	610	3	2	2
26	660	3	2	2
28	711	5	2	3
30	762	5	3	2
32	813	5	3	2
34	864	5	3	2
36	914	5	3	2
38	965	5	3	2
40	1016	5	3	2
42	1067	5	3	2
44	1118	7	3	2
46	1168	7	3	2
48	1219	7	3	2
50	1270	7	3	2
52	1321	7	3	2
54	1372	7	3	2
56	1422	7	4	3
58	1473	7	4	3
60	1524	9	4	3
62	1575	9	4	3

The number of sprockets depends on the belt load and may be different for driving and idling shafts. For calculation of correct sprocket number please use LINK-SeleCalc.

#### Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer. All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice. BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.