




KVP® Spiral 2" Pitch Belting

PR620 TTR (Spiral Pro - Tight Turn Radius)



Description

- 2 inch pitch
- Belt turning radius 1.0 times nominal belt width up to 44" wide.
- Belt turning radius 1.1 times nominal belt width greater than 44" wide.
- 56% open area
- Built to USDA and FDA standards
- Connecting rod diameter = 0.250 inch (6.4 mm)
- Standard belt width increments = 1 inch (25.4 mm) nominal, starting from 20 inches
- Material selection may affect belt width - please contact your local partner for actual dimensions

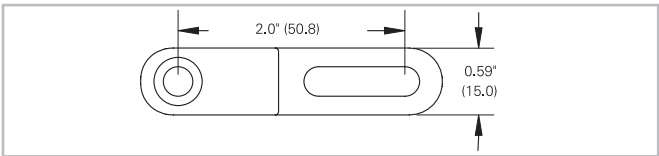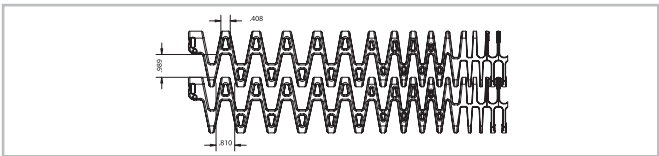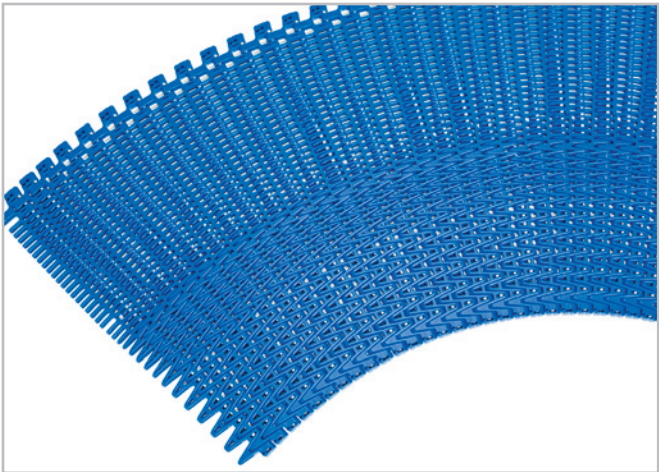


Belt data

Belt material		POM
Rod material		POM
Nominal tensile strength F_N in curve ⁽¹⁾	N lbf	2535 570
Temperature range	°C °F	-40 - 93 -40 - 200
Belt weight m_B	kg/m² lb/sqft	7.3 1.50
Standard belt color		blue

Additional belt colors and materials available, stainless steel rods available - contact your local partner.

Belt accessories

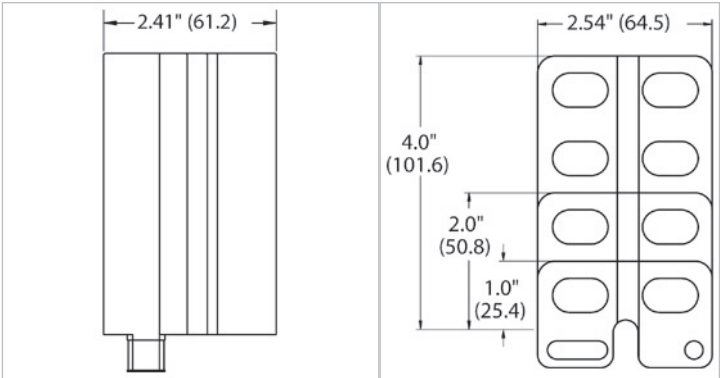

Sideplates

Available in 1/2", 1", 2" and 4" heights.

Lane Divider

Available in 1/2", 1", 2" and 4" heights.

KVP® Spiral 2" Pitch Belting

PR620 TTR (Spiral Pro - Tight Turn Radius)



Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.