

## 815 split molded sprocket

SPROCKETS & TURNING DISKS > CHAIN SPROCKETS

Also suitable for 881M

Molded Split-Sprocket series 815 z-25 b-1.1/4"

W/Grubscrew M8


Article-Nr: P51002YF



### Technical features

|                               |                           |
|-------------------------------|---------------------------|
| <b>Series</b>                 | 815                       |
| <b>Pitch</b>                  | 1.500 in                  |
| <b>Unit of measure</b>        | Ea                        |
| <b>Z-:</b>                    | 25                        |
| <b>Bore:</b>                  | o 1,25"                   |
| <b>Version:</b>               | Drive                     |
| <b>Temperature range dry:</b> | -68÷248 °F                |
| <b>Temperature range wet:</b> | -68÷248 °F                |
| <b>Box:</b>                   | 4                         |
| <b>Type:</b>                  | Split                     |
| <b>Execution:</b>             | Molded                    |
| <b>Pitch diameter:</b>        | 6.031 in                  |
| <b>Outer diameter:</b>        | 6.059 in                  |
| <b>S dimension:</b>           | 3.142 in                  |
| <b>Material:</b>              | PA - Polyamide reinforced |


Drive

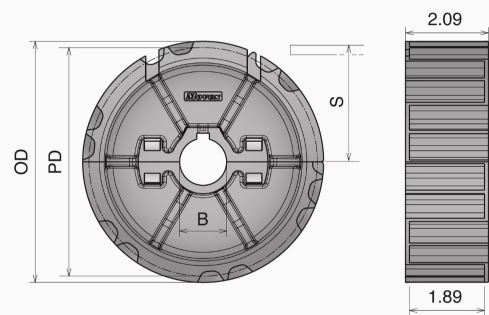

**Movex**

© Copyright Movex® S.p.A.

Idler

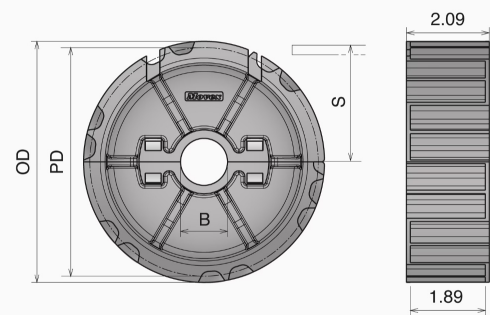

**Movex**

© Copyright Movex® S.p.A.