


HabasitLINK® Radius 1" Pitch Belting M2544 Tight Radius 1" MTW



Description

- Mold to width radius belt
- For radius and straight conveying, ideal for applications with limited space
- Collapse factor:
 - M2544K04: 1.25
 - M2544K06: 1.32
- Open area: 38 % (M2544K04), 32 % (M2544K06)
- Open contact area: 64 %
- Largest opening (belt edge):
 - 4" width: 7.6 mm x 14.5 mm (0.30" x 0.57")
 - 6" width: 10.0 mm x 12.8 mm (0.38" x 0.50")
- Largest opening (middle of belt) for 4" and 6":
 - 7.6 mm x 10.6 mm (0.30" x 0.39")
- Excellent for cooling and draining
- Easy to clean
- Food approved materials available
- Rod diameter 5 mm (0.2")

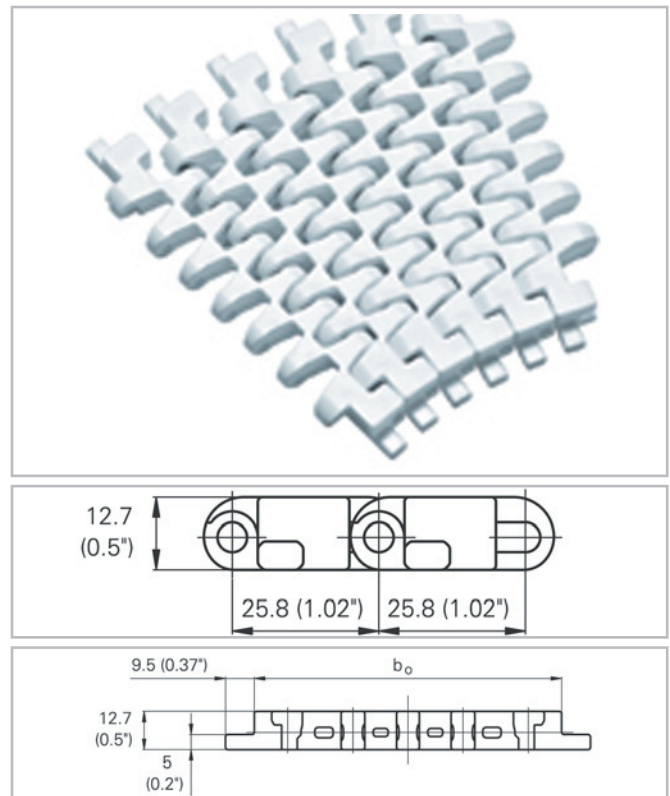

Belt data

	Nominal belt width b_0		Belt material	Rod material	Nominal tensile strength F_N straight run		Nominal tensile strength F_N in curve ⁽¹⁾		Belt weight m_B	
	mm	inch			N	lbf	N	lbf	kg/m	lb/ft
M2544K04	101.4	4.0	POM	PA	1500	338	1000	225	0.87	0.58
M2544K04	101.4	4.0	PP	PA	1200	270	600	135	0.60	0.40
M2544K04	101.4	4.0	PP	POM	1200	270	600	135	0.60	0.40
M2544K06	152.2	6.0	POM	PA	2500	563	1000	225	1.29	0.87
M2544K06	152.2	6.0	PP	PA	1800	404	600	135	0.87	0.58
M2544K06	152.2	6.0	PP	POM	1800	404	600	135	0.87	0.58

Real belt widths are in most cases 0.1% to 0.3% smaller.

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch
40	1.6	50	2	100	4	150	6

Temperature range

Module material	Rod material	Temperature range	
POM	PA	-40 °C to +93 °C	-40 °F to +200 °F
PP	PA	+5 °C to +105 °C	+40 °F to +220 °F
PP	POM	+5 °C to +93 °C	+40 °F to +200 °F

For detailed material properties refer to the HabasitLINK® Engineering Guidelines or contact your Habasit representative.

HabasitLINK® Radius 1" Pitch Belting M2544 Tight Radius 1" MTW



The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer. All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.