

HabasitLINK® Straight 2" Pitch Belting M5011 Perforated Flat Top 2"





Description

- 18% open area; largest opening 2x10 mm (0.08"x0.4")
- Solid plate
- Open hinge, easy to clean
- Food approved materials available
- Rod diameter 7 mm (0.27")

Available accessories

- Flights and scoops
- Sideguards
- Hold down devices
- GripTop modules

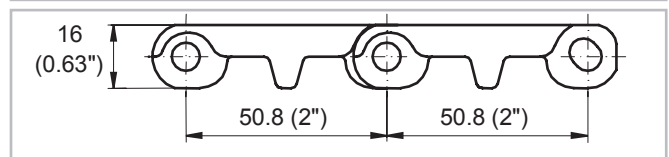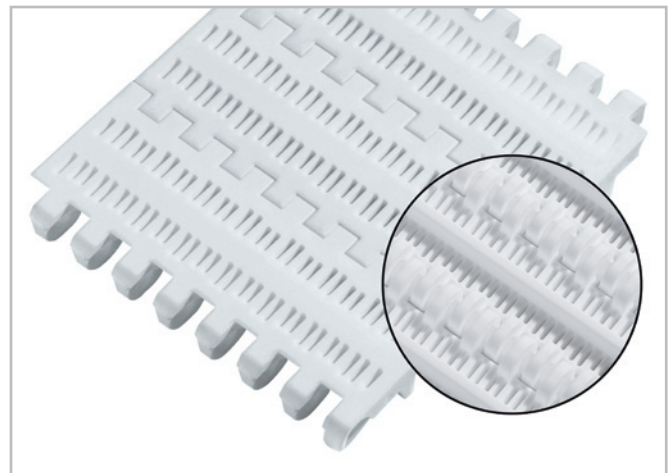

Belt data

Belt material		PP		PE		POM	
Rod material		PP	PA	PE	PA	PE	PA
Nominal tensile strength F'_N straight run	N/m	18000	18000	10000	10000	18000	30000
	lb/ft	1233	1233	685	685	1233	2055
Temperature range	°C	5 - 105	5 - 105	-70 - 65	-46 - 65	-40 - 65	-40 - 93
	°F	40 - 220	40 - 220	-94 - 150	-50 - 150	-40 - 150	-40 - 200
Belt weight m_B	kg/m ²	7.8	7.8	8.3	8.3	12.0	12.0
	lb/sqft	1.60	1.60	1.70	1.70	2.46	2.46

Belt material		POM +IM			
Rod material		PE		PA	
Nominal tensile strength F'_N straight run	N/m	18000		30000	
	lb/ft	1233		2055	
Temperature range	°C	-40 - 65		-40 - 93	
	°F	-40 - 150		-40 - 200	
Belt weight m_B	kg/m ²	12.0		12.0	
	lb/sqft	2.46		2.46	

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)		Backbending radius for elevators with sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
90	3.5	100	4	150	6	150	6	250	10

Use the largest possible backbending radius for elevators with side guards or hold down devices.

Standard range of belt widths b_0

mm (nom.)	75	150	225	300	375	450	525	600	675	750	825	900	975	1050	etc.
inch (nom.)	3	6	9	12	15	18	21	24	27	30	33	36	39	42	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 75 mm (3"). Non-standard widths are offered in increments of 18.75 mm (0.74"). Smallest possible width 112.5 mm (4.42"). Non-bricklaid belts 75 mm (3") and 150 mm (6") wide.

HabasitLINK® Straight 2" Pitch Belting M5011 Perforated Flat Top 2"



For detailed material properties refer to the HabasitLINK® Engineering Guidelines or contact your Habasit representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.