



HabasitLINK® Straight 2-1/2" Pitch Belting M6423 Non Slip 2.5"

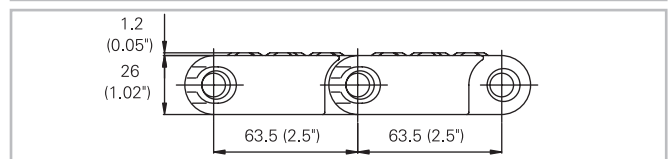

Description

- Heavy duty belt extremely strong and stiff
- 0% open area
- Closed hinge
- Rod diameter 10 mm (0.39")
- Smart Fit rod retention
- Non Slip profile for people mover applications
- Antistatic materials available
- Steel rods available
- Lug teeth solid sprockets

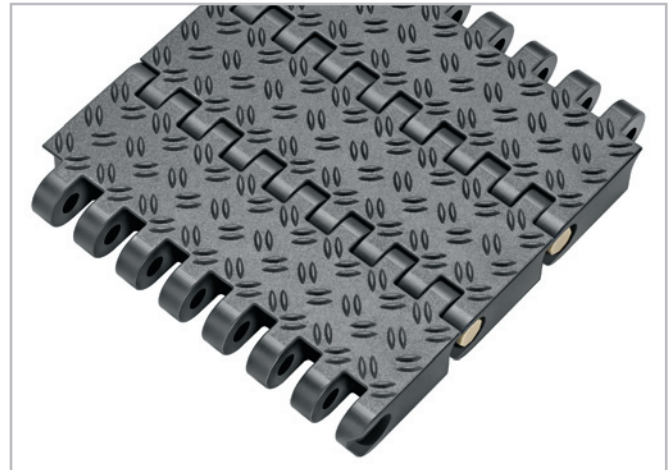

Belt data

Belt material		POM		POM +AS	
Rod material		PA	Stainless Steel	PA	Stainless Steel
Nominal tensile strength F_N straight run	N	100000	100000	100000	100000
	lbf	6854	6854	6854	6854
Temperature range	°C	-40 - 93	-40 - 93	-40 - 93	-40 - 93
	°F	-40 - 200	-40 - 200	-40 - 200	-40 - 200
Belt weight m_B	kg/m ²	27.6	35.6	27.6	35.6
	lb/sqft	5.66	7.30	5.66	7.30

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch
100	4	100	4	200	8	200	8

Standard range of belt widths b_0

mm (nom.)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	etc.
inch (nom.)	3.9	7.9	11.8	15.7	19.7	23.6	27.6	31.5	35.4	39.4	43.3	47.2	51.2	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 100 mm (3.9"). Non-standard widths are offered in increments of 50 mm (2"). Non-bricklaid belts 100 mm (3.9") and 200 mm (7.9").

For detailed material properties refer to the HabasitLINK® Engineering Guidelines or contact your Habasit representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

HabasitLINK® Straight 2-1/2" Pitch Belting M6423 Non Slip 2.5"



Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.