



# KVP® Straight 2" Pitch Belting MB620 VT (Monster Belt Vented Top)

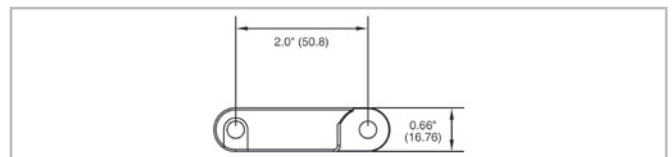

## Description

- 2 inch pitch
- Food approved materials
- Bi-directional
- Connecting rod diameter = 0.250 inch (6.4 mm)
- Vent top surface – 26% open
- Standard belt width increments = 3 inch (76.2 mm) nominal starting from 6 inches (152.4 mm)
- Material selection may affect belt width — please contact your local partner for actual dimensions

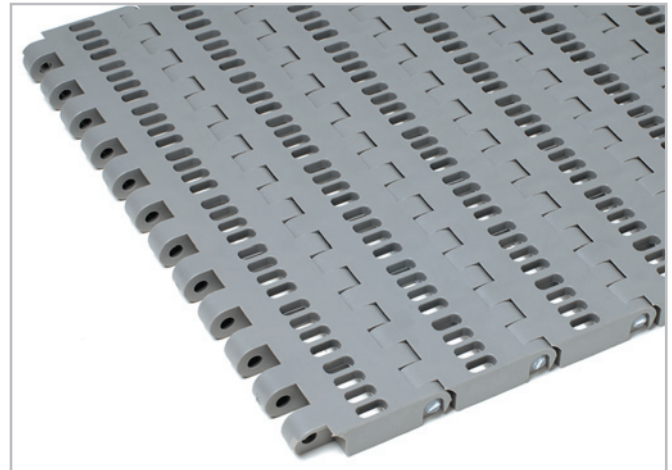


## Belt data

Belt material		PP
Rod material		PP
Nominal tensile strength $F'_N$ straight run	N/m lb/ft	44657 3060
Temperature range	°C °F	5 - 105 40 - 220
Belt weight $m_B$	kg/m <sup>2</sup> lb/sqft	10.5 2.14
Standard belt color		gray

Additional belt colors and materials available, abrasive resistant Nylon (Polyamide) and stainless steel rods available - contact your local partner.

## Belt accessories

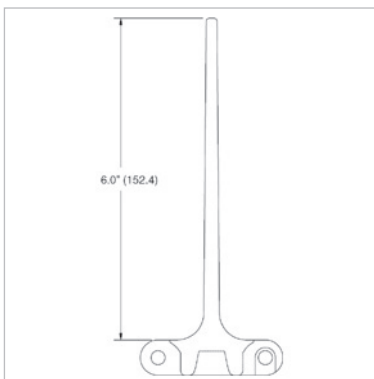

**Mitnehmer**  
Standard Mitnehmer erhältlich in 6" Höhe.

# KVP® Straight 2" Pitch Belting MB620 VT (Monster Belt Vented Top)



## **Product liability, application considerations**

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.